

# THAWZALL

Tamarack Industries

**XHR 700** YOUR INDUSTRY LEADER IN **RELIABLE** FLAMELESS HEAT



## FEATURES

- **NO DEF FLUID REQUIRED**
  - **NO HYDRAULIC FLUID**
- **VARIABLE AIR FLOW UP TO 3500 CFM**
  - **UP TO 5" STATIC PRESSURE**
- **MAX OUTLET TEMPERATURE = 200°F**
  - **40+ HOUR RUN TIME**
- **POSITIVE AIR SHUTOFF WITH AUTO RESET**
- **PLC CONTROLLED COLD START & HOT SHUT DOWN SEQUENCE**
- **LOW MAINTENANCE & EASY ACCESS FOR SERVICE POINTS**
  - **OPTIONAL LIGHT TOWER**

[WWW.THAWZALL.COM](http://WWW.THAWZALL.COM)



Tamarack  
Industries


## USER FRIENDLY CONTROLS



- 3 STEP START UP AT THE TOUCH OF A BUTTON
- ADJUSTABLE FAN SLIDE GATE SYSTEM ALLOWS YOU TO CONTROL AIR VOLUME UP TO 4000 CFM ALL WITH THE TOUCH OF A BUTTON!
- UP TO THE SECOND PERFORMANCE INFORMATION AVAILABLE

## SERVICE FRIENDLY

- XHR 700 HAS ONLY 4 SERVICE ITEMS, ENGINE COOLANT, ENGINE OIL & OIL FILTER, FUEL FILTER & AIR FILTER
- NO DEF FLUID
- NO HYDRAULIC FLUID, NO HYDRAULIC FILTERS, NO HYDRAULIC LEAKS, NO HYDRAULIC OIL TO DISPOSE OF

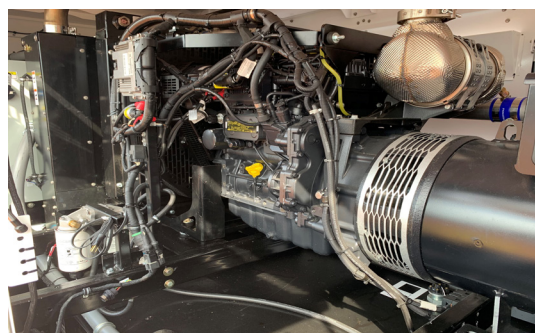

## XHR 700 SPECIFICATIONS

- Nominal Heat Output: 700,000 BTU/HR
- CFM: Variable up to 3500 CFM
- Max Heat Output: 200°F/93°C
- Engine: Fiat 3.4 W/Mecc Alte Generator 60 KW
- Optional Engine: Deutz 2.9 W/Mecc Alte Generator 60 KW
- Optional Engine: CAT 2.8 W/Mecc Alte Generator 60 KW
- Positive Air Shutoff: Auto Reset
- Air Handler: 5 HP Blower
- LxWxH: 155"x72"x87"
- Fuel Capacity: 160 Gallons/ 605 Liters
- Fuel Containment: 120%
- Fuel Burn (Max): up to 4.90 GPH
- Run time: Approx 40 + Hours
- Weight: 5200 lbs-no fuel, 6300lbs-fuel
- Outlets: 2X12"

As a result of our constant drive to improve our product offering specifications are subject to change.

## NEW OPTIONAL LED LIGHT TOWER



- TELESCOPIC HYDRAULIC VERTICAL 23 FT MAST,
- 188,000 TOTAL LMS