

THAWZALL

XHR 700

YOUR INDUSTRY LEADER IN
RELIABLE FLAMELESS HEAT



FEATURES

- NO DEF FLUID REQUIRED
 - NO HYDRAULIC FLUID
- VARIABLE AIR FLOW UP TO 2000- 6000 CFM
 - UP TO 6" STATIC PRESSURE
 - 656,000 BTU/HR
 - MAX OUTLET TEMPERATURE = 200 °F
 - POSITIVE AIR SHUTOFF WITH AUTO RESET
- PLC CONTROLLED COLD START & HOT SHUT DOWN SEQUENCE
 - LOW MAINTENANCE & EASY ACCESS FOR SERVICE POINTS
 - LOWER DUCT LOUVERS TO CONTROL AIRFLOW

WWW.TAMARACK-INDUSTRIES.COM

WWW.THAWZALL.COM



**Tamarack
Industries**



USER FRIENDLY CONTROLS


- 3 Step start up at the touch of the button
- Variable speed fan allows you to control air volume from 2000 - 6000 CFM
- Up to the second performance information available
- Single set point or high, medium, low temperature control

BUILT TO LAST

- Rugged design
- Built to withstand any job site conditions

SERVICE FRIENDLY

- XHR has only 4 service items: *Engine coolant, engine oil & oil filter, fuel filter & air filter*
- No def fluid
- No hydraulic fluid, no hydraulic filters, no hydraulic leaks, no hydraulic oil to dispose of

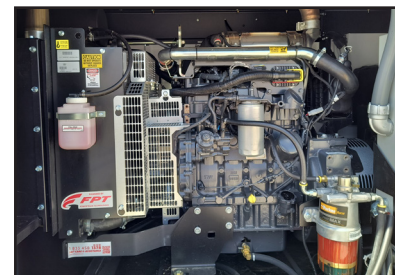

XHR 700 SPECIFICATIONS

• Nominal Heat Output	656,000 BTU/HR	• LxWxH	164" x 75" x 86"
• CFM	2000 - 6000 CFM	• Fuel Capacity	160 Gallons
• Max Heat Output	200°F/93 °C	• Fuel Burn (Max)	4.2 GPH
• Engine	Fiat F28- 74 HP W/Mecc Alte 3PH, 480V (240 volt- only at the outlet with the transformer)	• Run time	35 + Hours
• Optional Engines	Deutz TD 3.6, Cat 2.8	• Weight	5200 lbs-no fuel, 6000 lbs-fuel
• Positive Air Shutoff	Auto Reset	• Outlets	2-12" Outlet has damper in lower duct
• Air Handler	6 HP Blower, variable speed	• Low fuel shut down	
• Primary fuel filter system with thermostat controlled fuel heaters			

OPTIONS:

• RETURN AIR DUCT



- 2 x 12" or 1 x 16" with return air duct
- Return air duct saves fuel by recirculating already warm air

Printed in Canada- 2026
Specifications subject to change without notice.


• LIFTING POINT

- **REMOTE THERMOSTAT**
for increased fuel efficiency

- **TELEMATICS**
with engine and machine information

• CRANKCASE PRESSURE SHUT DOWN

• POWER DISTRIBUTION

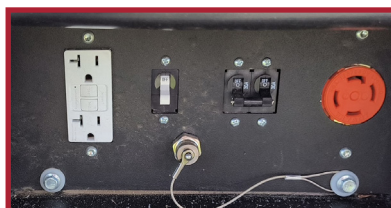

• LED LIGHT TOWER



- Telescopic hydraulic vertical 23 ft mast
- 252,000 total lumens

