

# THAVZALL

Tamarack Industries

## XHR 700

YOUR INDUSTRY LEADER IN **RELIABLE** FLAMELESS HEAT



### FEATURES

- OUTPUT OF 700,000 BTU/HR
  - NO DEF FLUID REQUIRED
- VARIABLE AIR FLOW OF 3,000 TO 7,000 CFM
  - UP TO 5" STATIC PRESSURE
- MAX OUTLET TEMPERATURE = 200°F
  - 60+ HOUR RUN TIME
- POSITIVE AIR SHUTOFF WITH AUTO RESET
  - TRUE FLAMELESS HEATER
- PLC CONTROLLED COLD START & HOT SHUT DOWN SEQUENCE
- EASY ACCESS TO THE UNIT FOR MAINTENANCE

[WWW.THAVZALL.COM](http://WWW.THAVZALL.COM)



Tamarack  
Industries


## USER FRIENDLY CONTROLS



- 3 STEP START UP AT THE TOUCH OF A BUTTON
- ADJUSTABLE FAN SLIDE GATE SYSTEM ALLOWS YOU TO CONTROL AIR VOLUME FROM 3,000 TO 7,000 CFM ALL WITH THE TOUCH OF A BUTTON!
- UP TO THE SECOND PERFORMANCE INFORMATION AVAILABLE

## SERVICE FRIENDLY

- XHR 700 HAS ONLY 4 SERVICE ITEMS, ENGINE OIL, ENGINE OIL FILTER, FUEL FILTER & AIR FILTER
- NO DEF FLUID
- NO HYDRAULIC FLUID, NO HYDRAULIC FILTERS, NO HYDRAULIC LEAKS, NO HYDRAULIC OIL TO DISPOSE OF

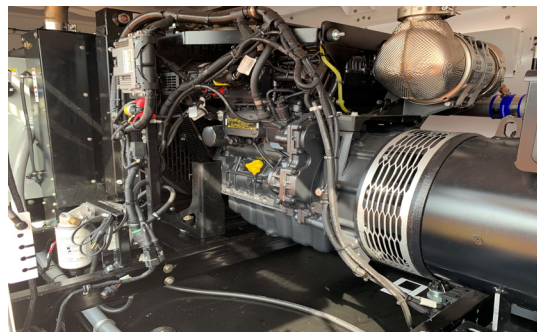

## XHR 700 SPECIFICATIONS

- Nominal Heat Output: 700,000 BTU/HR
- CFM: Variable 3,000 to 7,000 CFM
- Max Heat Output: 200°F/93°C
- Engine: Fiat Cat C3.4B W/Mecc Alte Generator 60 KW
- Optional Engine: Deutz 2.9 W/Mecc Alte Generator 60 KW
- Positive Air Shutoff: Auto Reset
- Air Handler: 5 HP Blower
- LxWxH: 14'10"x7'10"x7'6"
- Fuel Capacity: 190 Gallons/ 719 Liters
- Fuel Containment: 120%
- Fuel Burn (Max): up to 4.90 GPH
- Run time: Approx 60 + Hours
- Weight: 6340 lbs/ 2876 Kg Dry, 7860 lbs/ 3565 kg Full of Fuel
- Outlets: 2X16"



As a result of our constant drive to improve our product offering specifications are subject to change.