

THAWZALL

Tamarack Industries

XHR

YOUR INDUSTRY LEADER IN **RELIABLE** FLAMELESS HEAT



FEATURES

- **NO DEF FLUID REQUIRED**
 - **NO HYDRAULIC FLUID**
- **VARIABLE AIR FLOW UP TO 4000 CFM**
 - **UP TO 5" STATIC PRESSURE**
- **MAX OUTLET TEMPERATURE = 200°F**
 - **40+ HOUR RUN TIME**
- **POSITIVE AIR SHUTOFF WITH AUTO RESET**
- **PLC CONTROLLED COLD START & HOT SHUT DOWN SEQUENCE**
- **LOW MAINTENANCE & EASY ACCESS FOR SERVICE POINTS**
 - **OPTIONAL LIGHT TOWER**

WWW.THAWZALL.COM



Tamarack
Industries


USER FRIENDLY CONTROLS



- 3 STEP START UP AT THE TOUCH OF A BUTTON
- ADJUSTABLE FAN SLIDE GATE SYSTEM ALLOWS YOU TO CONTROL AIR VOLUME UP TO 4000 CFM ALL WITH THE TOUCH OF A BUTTON!
- UP TO THE SECOND PERFORMANCE INFORMATION AVAILABLE

SERVICE FRIENDLY

- XHR HAS ONLY 4 SERVICE ITEMS, ENGINE COOLANT, ENGINE OIL & OIL FILTER, FUEL FILTER & AIR FILTER
- NO DEF FLUID
- NO HYDRAULIC FLUID, NO HYDRAULIC FILTERS, NO HYDRAULIC LEAKS, NO HYDRAULIC OIL TO DISPOSE OF

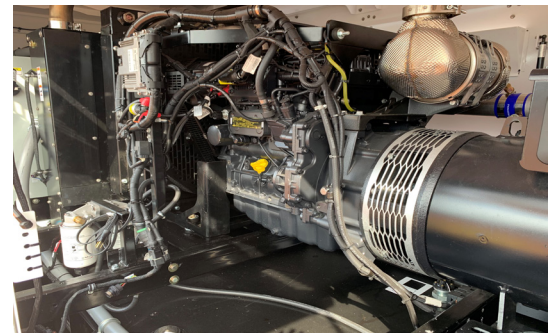

XHR 700 SPECIFICATIONS

- Nominal Heat Output: 656,000 BTU/HR
- CFM: Variable up to 4000 CFM
- Max Heat Output: 200°F/93°C
- Engine: Fiat 3.4 W/Mecc Alte Generator 60 KW
- Optional Engine: Deutz 3.6 W/Mecc Alte Generator 60 KW
- Optional Engine: CAT 2.8 W/Mecc Alte Generator 60 KW
- Positive Air Shutoff: Auto Reset
- Air Handler: 5 HP Blower
- LxWxH: 155" x 72" x 87"
- Fuel Capacity: 150 Gallons/ 568 Liters
- Fuel Containment: 120%
- Fuel Burn (Max): up to 4.90 GPH
- Run time: Approx 40 + Hours
- Weight: 5200 lbs-no fuel, 6000lbs-fuel
- Outlets: 2X12" or optional 1x16"

As a result of our constant drive to improve our product offering specifications are subject to change.

**NEW
OPTIONAL LED
LIGHT TOWER**

**NEW
LIFTING
HOOKS**



- TELESCOPIC HYDRAULIC
- VERTICAL 23 FT MAST,
- 188,000 TOTAL LMS