

THAWZALL

XHR-GSE HEAT CART

RELIABLE, FLAMELESS HEAT FOR THE AIRLINE INDUSTRY




XHR-GSE 500
XHR-GSE 700

FEATURES

- TRAILER OR CART MOUNTED
 - DUCT UP TO 200 FT
 - NO DEF FLUID REQUIRED
 - NO HYDRAULIC FLUID
- 475,000 BTU/HR or 656,000 BTU/HR
- MAX OUTLET TEMPERATURE = 200 °F
 - LOW MAINTENANCE
- EASY ACCESS FOR SERVICE POINTS
- RUGGED DESIGN- BUILT TO LAST

OPTIONAL

- REMOTE THERMOSTAT
- TELEMATICS
- RETURN AIR DUCT
- POWER DISTRIBUTION

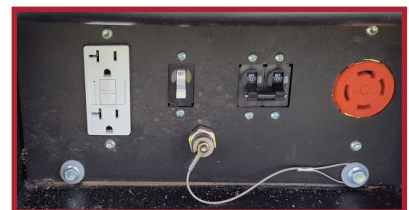

WWW.TAMARACK-INDUSTRIES.COM

WWW.THAWZALL.COM



Tamarack
Industries

USER FRIENDLY CONTROLS



- 3 Step start up at the touch of the button
- Variable speed fan allows you to control air volume
- Up to the second performance information available
- Single set point or high, medium, low temperature control



COLD WEATHER PERFORMANCE



Date	Outside Temp (°F)	Discharge Temp (°F)	Outside Temp (°C)	Discharge Temp (°C)
06-Feb	-22	188	-30	87
07-Feb	-15	192	-26	89
08-Feb	5	200	-15	93
09-Feb	-8	190	-22	88
10-Feb	-2	191	-19	88
14-Feb	-4	201	-20	94
15-Feb	-26	175	-32	79
16-Feb	-35	160	-37	71
20-Feb	-36	148	-38	64
21-Feb	-35	180	-37	82
22-Feb	-33	160	-36	71
23-Feb	-33	173	-36	78
24-Feb	-26	176	-32	80

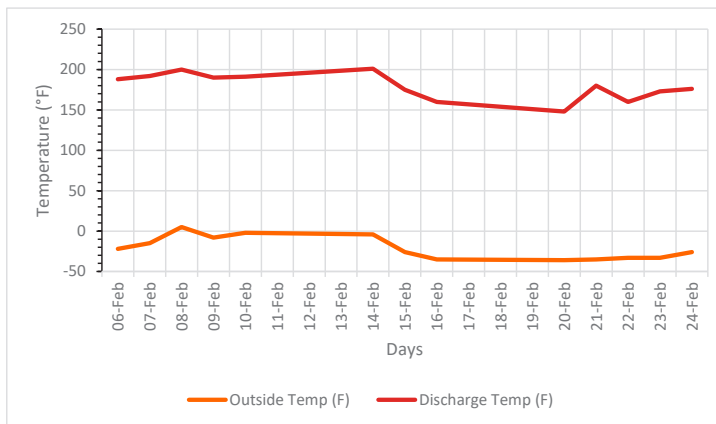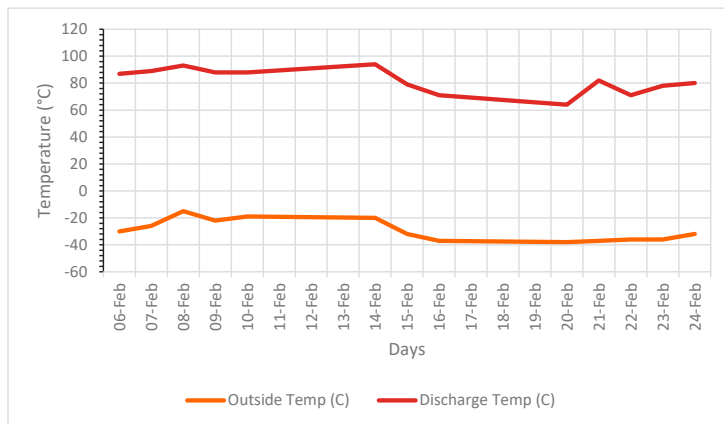

SERVICE FRIENDLY

- Only 4 service items: *Engine coolant, engine oil & oil filter, fuel filter & air filter*
- No def fluid
- No hydraulic fluid, no hydraulic filters, no hydraulic leaks, no hydraulic oil to dispose of

XHR-GSE 500 / XHR-GSE 700 SPECIFICATIONS

• Nominal Heat Output	475,000 or 656,000 BTU/HR	• LxWxH	164" x 75" x 86"
• CFM	2000 - 5000 CFM or 2000 - 7000 CFM	• Fuel Capacity	90 or 138 Gallons
• Max Heat Output	200 °F/93 °C	• Fuel Burn (Max)	3.4 /4.2 GPH
• Engine	50 HP: Fiat F28 74 HP: Deutz TD 3.6, Cat 2.8, Fiat F28	• Run time	32 + Hours
• Positive Air Shutoff	Auto Reset	• Weight	4800 lbs-no fuel, 5400lbs-fuel
• Air Handler	6 HP Blower, variable speed	• Outlets	2-12" Outlet has damper in lower duct
• Primary fuel filter system with thermostat controlled fuel heaters		• Optional Power	1-120 V 20A Duplex 1-240V 30A Twist Lock
• Low fuel shut down			

Specifications subject to change without notice.

